


Specifications

- **Open-loop stroke: 1200 μm @ 150V (fixed-free)**
*Tolerance value: 960~1440 μm
 - **Operating voltage: -20 V ~ +150 V**
 - **Stiffness in motion direction: 0.02 N/ μm**
 - **Resonance frequency(fixed-free): 400 Hz**
*Tolerance value: 320~480 Hz
 - **Blocked force: 22 N** (*Tolerance value: 17.6~26.4N)
 - **Capacitance: 4.4 μF**
 - **Dimension: 67x86x8 mm**
 - **Mechanical interface: $\phi 2.2$ hole**
 - **Environment: 0 to 85°C with humidity less than 40%**
 - **Mass: 120 g**
- *All dimensions and specifications stated are nominal.

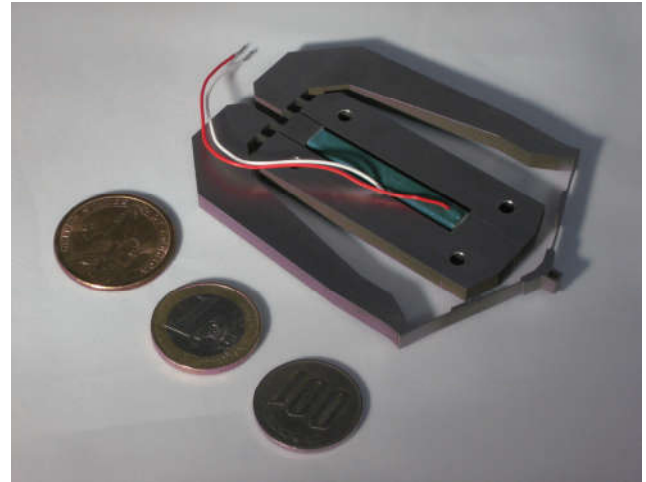

Option:

- Mechanical interface can be tailor with an addition option fees.

Geometry

