


## Specifications

- **Open-loop stroke: 2400  $\mu\text{m}$  @ 150V (fixed-free)**
  - \*Tolerance value: 1920~2880  $\mu\text{m}$
  - **Operating voltage: -20 V ~ +150 V**
  - **Stiffness in motion direction: 0.005 N/ $\mu\text{m}$**
  - **Resonance frequency(fixed-free): 190 Hz**
  - \*Tolerance value: 152~228 Hz
  - **Blocked force: 11 N (\*Tolerance value: 8.8~13.2N)**
  - **Capacitance: 4.7  $\mu\text{F}$**
  - **Dimension: 77x91x8.6 mm**
  - **Mechanical interface:  $\phi$  2.2 hole**
  - **Environment: 0 to 85°C with humidity less than 40%**
  - **Mass: 138 g**
- \*All dimensions and specifications stated are nominal.

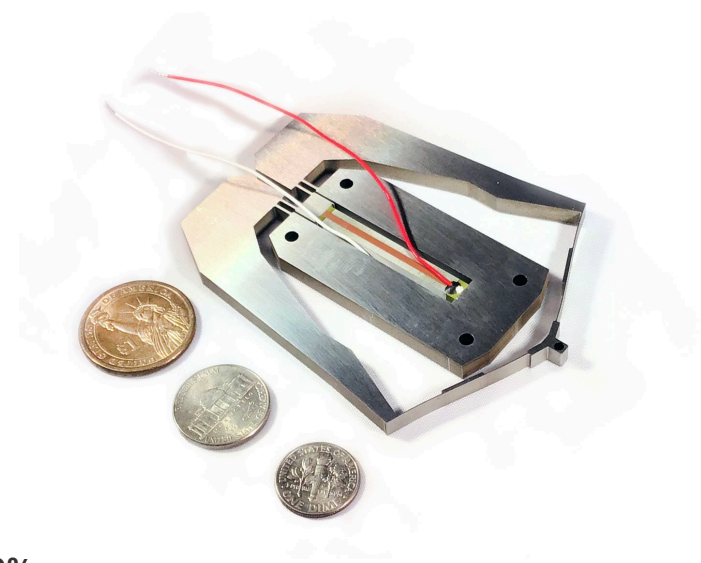

### Option:

- Mechanical interface can be tailor with an addition option fees.

### Geometry

