


Specifications

- **Open-loop stroke: 1450 μm @ 150V (fixed-free)**
*Tolerance value: 1160~1740 μm
 - **Operating voltage: -20 V ~ +150 V**
 - **Stiffness in motion direction: 0.048 N/ μm**
 - **Resonance frequency(fixed-free): 425 Hz**
*Tolerance value: 340 ~ 510 Hz
 - **Blocked force: 70 N** (*Tolerance value: 56~84N)
 - **Capacitance: 25 μF**
 - **Dimension: 79x94x10 mm**
 - **Mechanical interface: it is customizable**
 - **Environment: 0 to 85°C with humidity less than 40%**
 - **Mass: 395 g**
- *All dimensions and specifications stated are nominal.

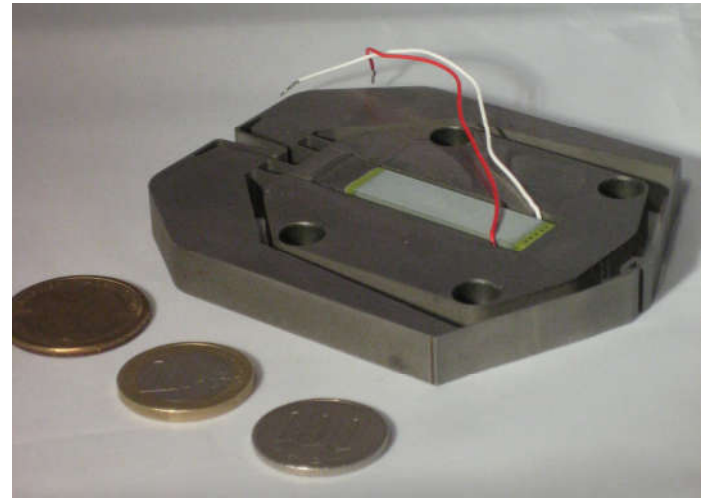

Option:

- Mechanical interface can be tailor with an addition option fees.

Geometry

