

## Specifications

• **Open-loop stroke: 830  $\mu\text{m}$  @ 150V (fixed-free)**

\*Tolerance value: 660~1000  $\mu\text{m}$

• **Operating voltage: -20 V ~ +150 V**

• **Stiffness in motion direction: 0.12 N/ $\mu\text{m}$**

• **Resonance frequency(fixed-free): 290 Hz**

\*Tolerance value: 232~348 Hz

• **Blocked force: 100 N** (\*Tolerance value: 80~120N)

• **Capacitance: 11.5  $\mu\text{F}$**


• **Dimension: 52x16x16 mm**

• **Mechanical interface: 2-M3 Tapped hole at both sides**

• **Environment: 0 to 85°C with humidity less than 40%**

• **Mass: 48 g**

\*All dimensions and specifications stated are nominal.

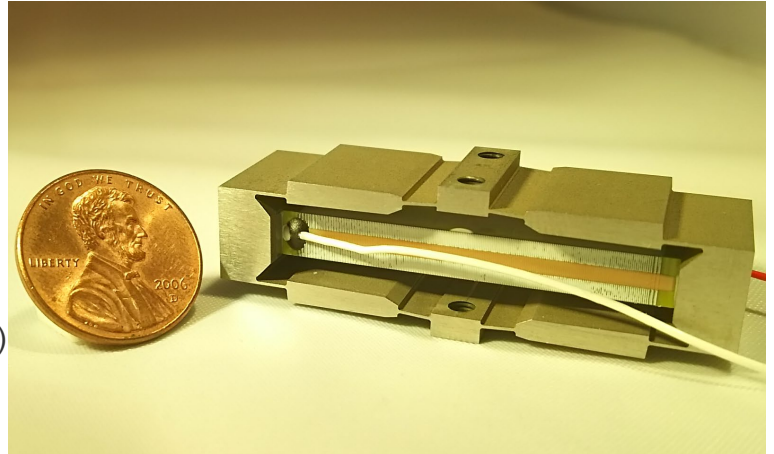

### Option:

• Mechanical interface can be tailor with an addition option fees.

### Geometry

