



Specifications

- **Open-loop stroke: 580 μm @ 150V (fixed-free)**
 - *Tolerance value: 435~725 μm
 - **Operating voltage: -20 V ~ +150 V**
 - **Stiffness in motion direction: 0.14 N/ μm**
 - **Resonance frequency(fixed-free): 282 Hz**
 - *Tolerance value: 210~350 Hz
 - **Blocked force: 80 N** (*Tolerance value: 64.0~96.0N)
 - **Capacitance: 11.6 μF**
 - **Dimension: 64x10x21.4 mm**
 - **Mechanical interface: 2-M2.0 Tapped hole and 4-M2.0 Tapped hole**
 - **Environment: 0 to 85°C with humidity less than 40%**
 - **Mass: 40 g**
- *All dimensions and specifications stated are nominal.

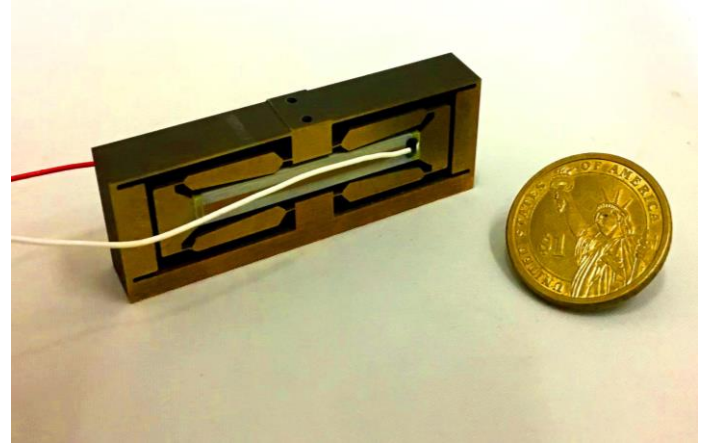

Option:

- Mechanical interface can be tailor with an addition option fees.

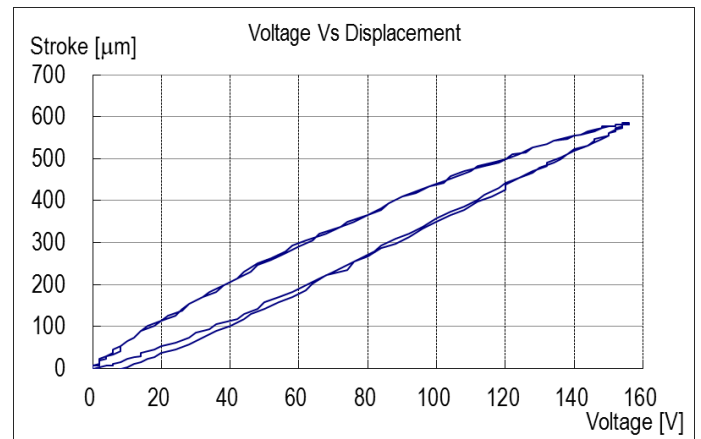

Geometry

