



## Specifications

- **Open-loop stroke: 580  $\mu\text{m}$  @ 150V (fixed-free)**
  - \*Tolerance value: 435~725  $\mu\text{m}$
  - **Operating voltage: -20 V ~ +150 V**
  - **Stiffness in motion direction: 0.14 N/ $\mu\text{m}$**
  - **Resonance frequency(fixed-free): 282 Hz**
  - \*Tolerance value: 210~350 Hz
  - **Blocked force: 80 N** (\*Tolerance value: 64.0~96.0N)
  - **Capacitance: 11.6  $\mu\text{F}$**
  - **Dimension: 64x10x21.4 mm**
  - **Mechanical interface: 2-M2.0 Tapped hole and 4-M2.0 Tapped hole**
  - **Environment: 0 to 85°C with humidity less than 40%**
  - **Mass: 40 g**
- \*All dimensions and specifications stated are nominal.

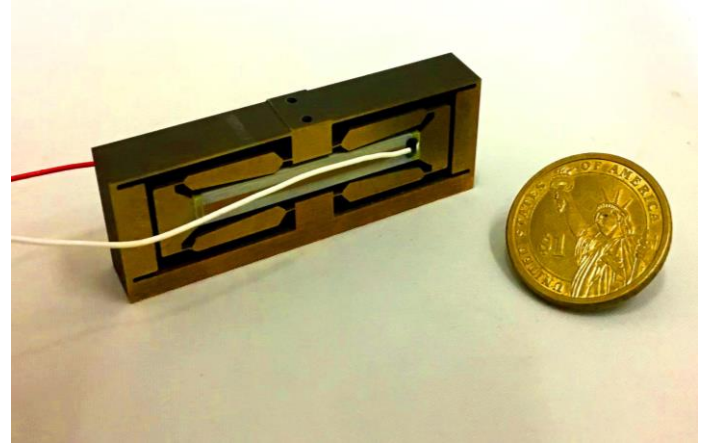

### Option:

- Mechanical interface can be tailor with an addition option fees.

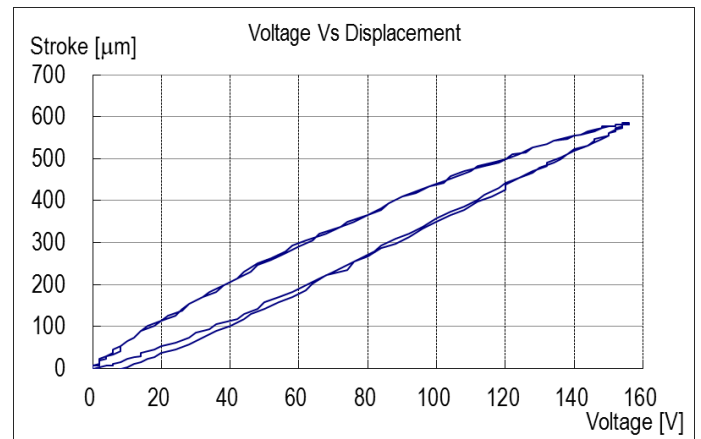

### Geometry

