


Specifications

- **Open-loop stroke: 600 μm @ 150V (fixed-free)**
 - *Tolerance value: 410~690 μm
 - **Operating voltage: -20 V ~ +150 V**
 - **Stiffness in motion direction: 0.13 N/ μm**
 - **Resonance frequency(fixed-free): 300 Hz**
 - *Tolerance value: 240~360 Hz
 - **Blocked force: 80 N** (*Tolerance value: 64.0~96.0N)
 - **Capacitance: 2.6 μF**
 - **Dimension: 46.8x12x12.6 mm**
 - **Mechanical interface: 2-M2.0 Tapped hole at both sides**
 - **Environment: 0 to 85°C with humidity less than 40%**
 - **Mass: 40 g**
- *All dimensions and specifications stated are nominal.

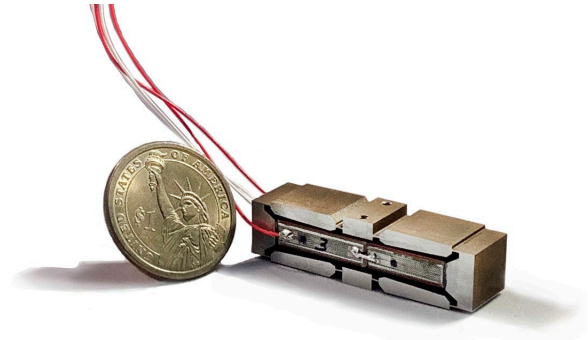

Option:

- Mechanical interface can be tailor with an addition option fees.

Geometry

