


Specifications

- **Open-loop stroke: 250 μm @ 150V (fixed-free)**
 *Tolerance value: 200~300 μm
- **Operating voltage: -20 V ~ +150 V**
- **Stiffness in motion direction: 0.72 N/ μm**
- **Resonance frequency(fixed-free): 1900 Hz**
 *Tolerance value: 1425 ~ 2375 Hz
- **Blocked force: 180 N** (*Tolerance value: 135~225N)
- **Capacitance: 5.2 μF**
- **Dimension: 36x16x11.8 mm**
- **Mechanical interface: 2-M2.0 Tapped hole and 4-M2.0 Tapped hole**
- **Environment: 0 to 85°C with humidity less than 40%**
- **Mass: 35.0 g**

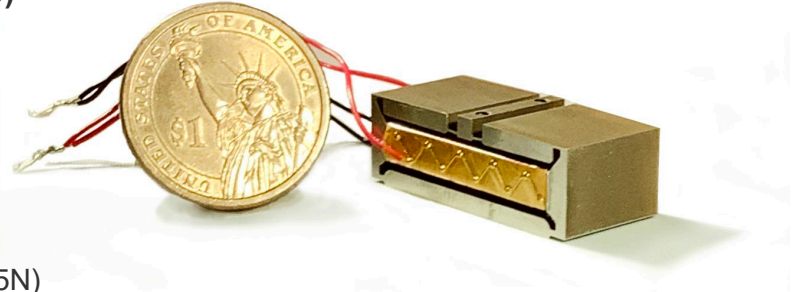

*All dimensions and specifications stated are nominal.

Option:

- Mechanical interface can be tailor with an addition option fees.

Geometry

