

Specifications


- **Open-loop stroke: 300 μm @ 150V (fixed-free)**
*Tolerance value: 240~360 μm
 - **Operating voltage: -20 V ~ +150 V**
 - **Stiffness in motion direction: 0.27 N/ μm**
 - **Resonance frequency(fixed-free): 1500 Hz**
*Tolerance value: 1200~1800 Hz
 - **Blocked force: 80 N** (*Tolerance value: 64~96N)
 - **Capacitance: 3.22 μF**
 - **Dimension: 58x5x25 mm**
 - **Mechanical interface: 1-M3 Tapped hole and 3-M2 Tapped hole**
 - **Environment: 0 to 85°C with humidity less than 40%**
 - **Mass: 36 g**
- *All dimensions and specifications stated are nominal.



Option:

- Mechanical interface can be tailor with an addition option fees.

Geometry

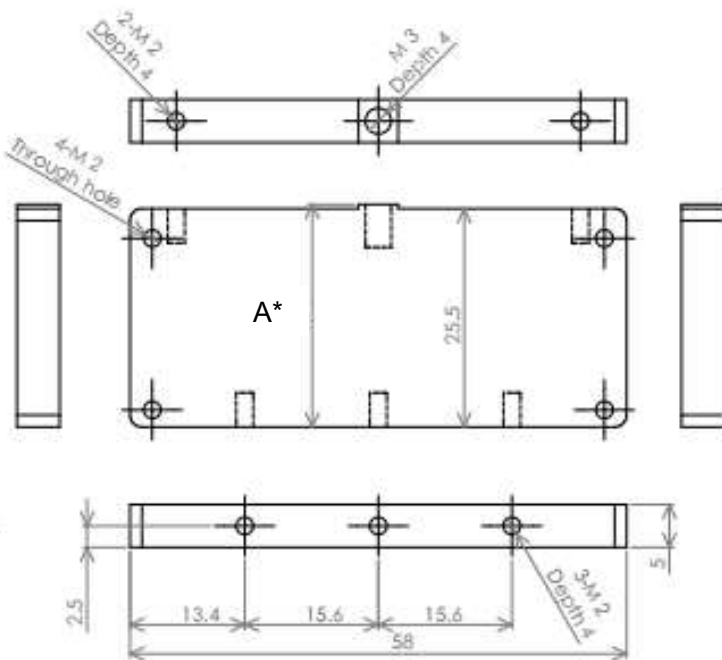

*Note: Dimension of A will be notified during product delivery

