


Specifications

- **Open-loop stroke: 60 μm @ 150V (fixed-free)**
*Tolerance value: 45~75 μm
- **Operating voltage: -20 V ~ +150 V**
- **Stiffness in motion direction: 0.28 N/ μm**
- **Resonance frequency(fixed-free): 7400 Hz**
*Tolerance value: 5550~9250 Hz
- **Blocked force: 17 N** (*Tolerance value: 13.0~21.0N)
- **Capacitance: 0.15 μF**
- **Dimension: 14.7x8x4.5 mm**
- **Mechanical interface: 2-M2 Tapped hole and 4-M2 Tapped hole**
- **Environment: 0 to 85°C with humidity less than 40%**
- **Mass: 3.0 g**

*All dimensions and specifications stated are nominal.

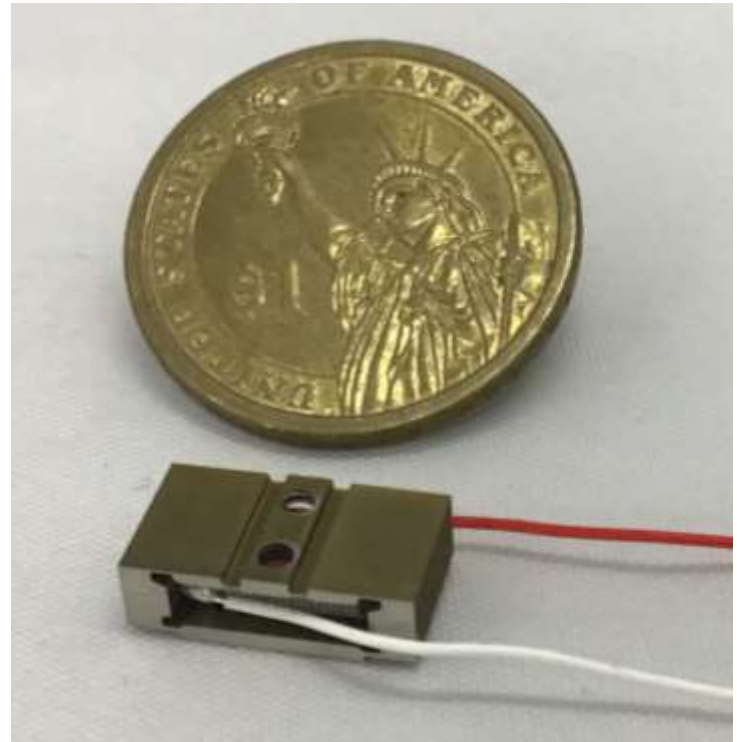

Option:

- Mechanical interface can be tailor with an addition option fees.

Geometry

